


Duplexer/Triplexer



MX72H

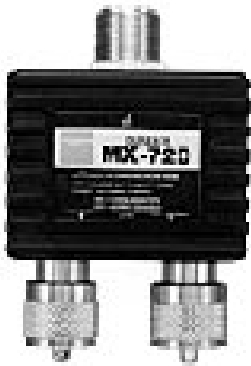

MX72D

Duplexer HF/144/430MHz
Model MX-72N MX-72H MX-72D
Passband width LPF:1.6 to 30MHz 140 to 150MHz HPF:400 to 460MHz
(LPF:1.6 to 225MHz HPF:340 to 1000MHz receiving only)
Power rating 1.6 to 30MHz:400W(CW)/1kW(PEP)
140 to 150MHz:150W(CW)/400W(PEP)
400 to 460MHz:100W(CW)/250W(PEP)
Insertion loss LPF: Less than 0.15dB
HPF: Less than 0.25dB LPF: Less than 0.1dB
HPF: Less than 0.2dB
Isolation LPF: More than 60dB
Impedance 50ohms
VSWR Less than 1.2:1
Connector (MIX)M-J
(144)M-P
(430)N-P (MIX)M-J
(144)M-P
(430)M-P (MIX)M-J
(144)M-P
(430)M-P

Coaxial cable	5D-2VS(35cm)	-	
Dimensions	46Wx25x57Dmm		46Wx27Hx57Dmm
Weight	220g	180g	